



Stainless steel spider fittings Stainless Steel SS304/SS316/SS2205

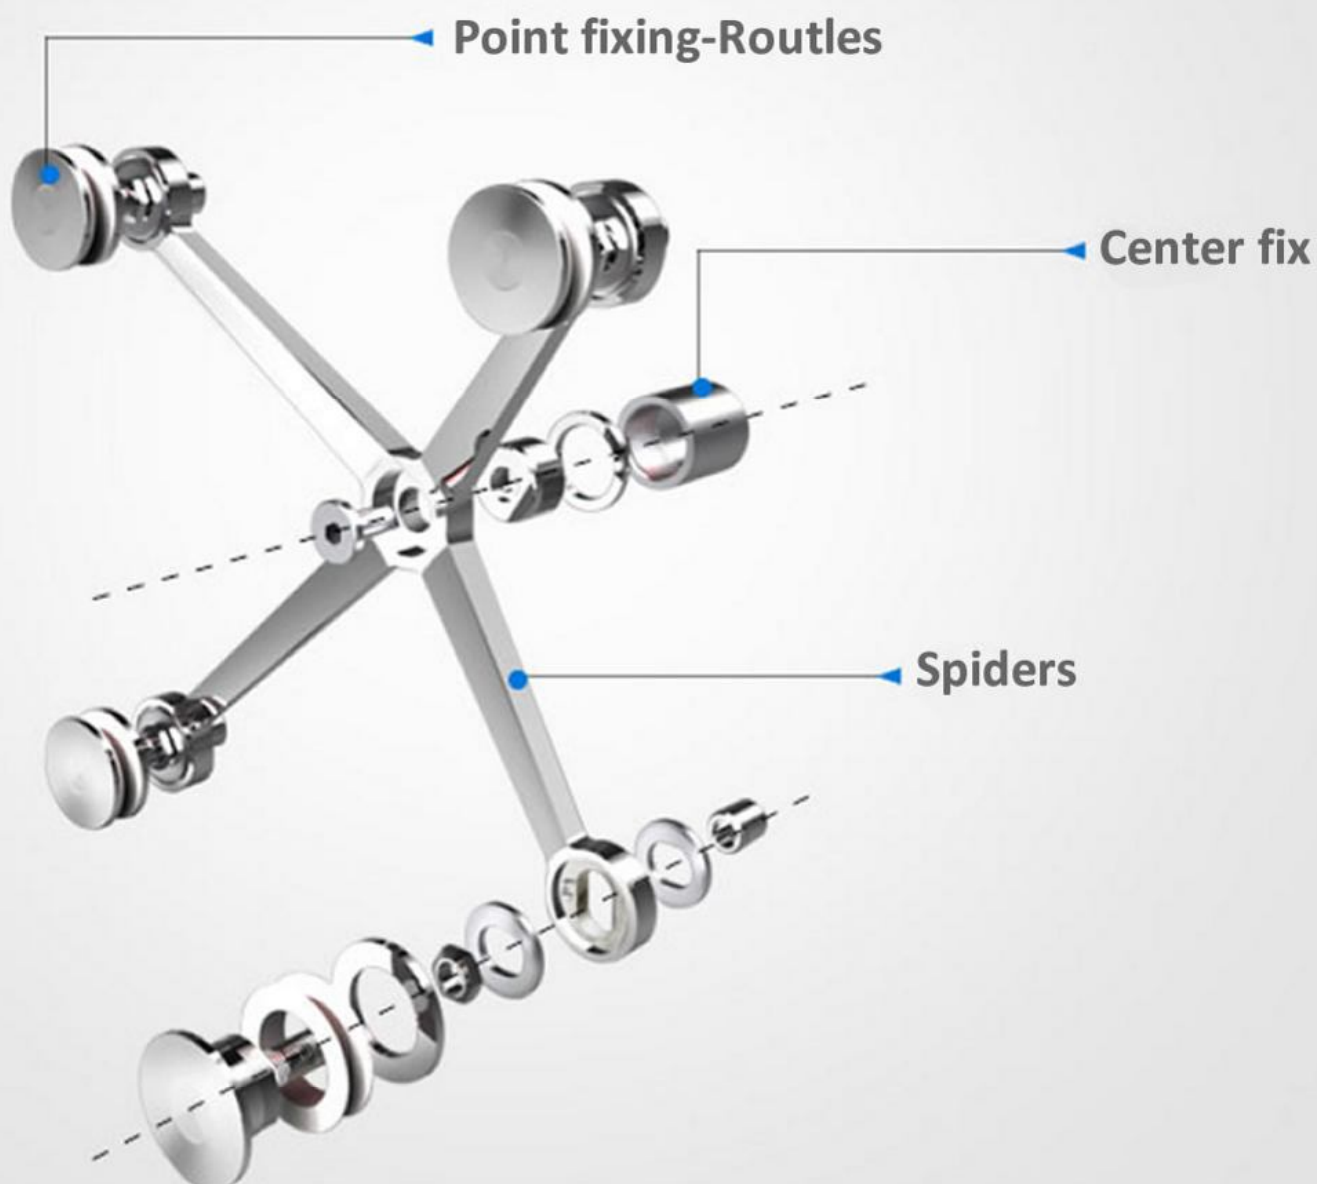

Production types
150mm, 200mm, 220mm, 250mm, 300mm

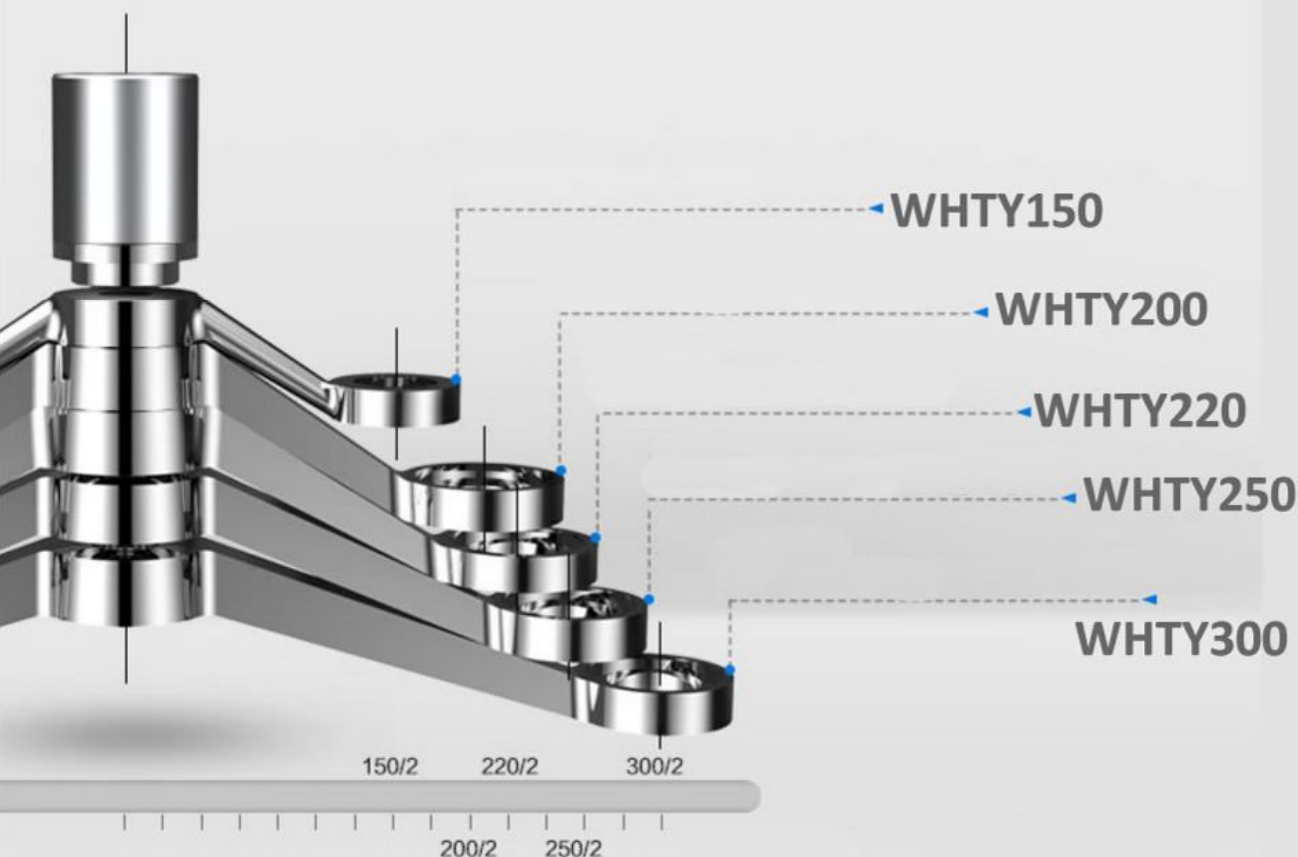

Production Process

A: High quality casting materials

B: Precision Turning process

C: Precision polishing



选材

Best Material



加工

Precision CNC turning



打磨/抛光

Precision polishing

Spider leg types

4 legs, 3 legs, 2 legs 90degree, 2 legs 180degree, 1 leg



4 legs

3 legs

可衔接四块玻璃，常用于主体中央

可衔接三块玻璃，常用于主体拐角处




2 legs

1 leg

可衔接两块玻璃，常用于主体边缘

可衔接一块玻璃，主要配合90° 两爪使用，
常用于主体边缘角

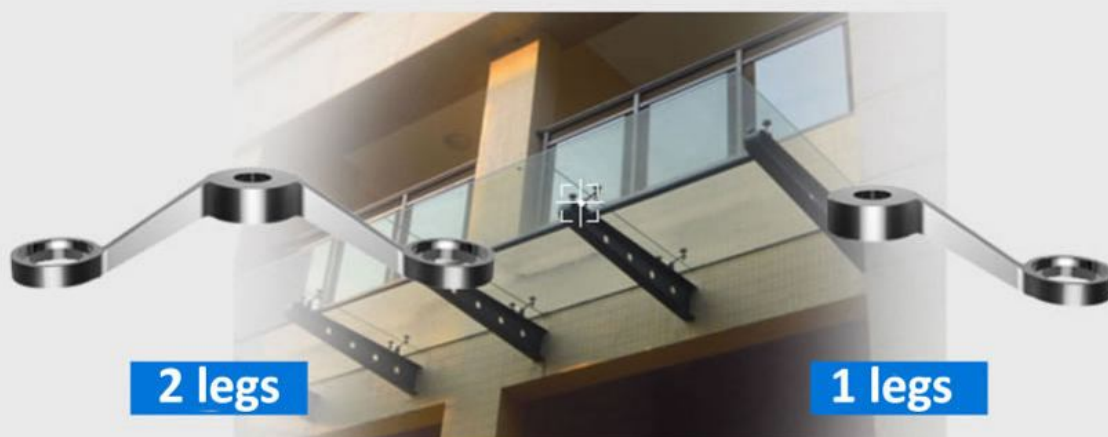


2 legs


1 leg

Drawings of Spider 220mm types


4 legs

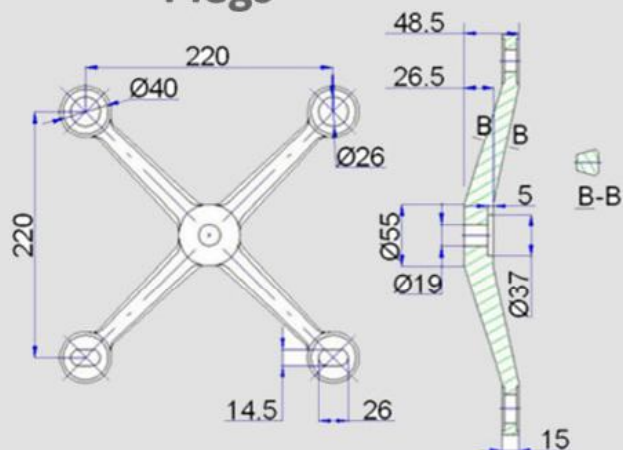


3 legs

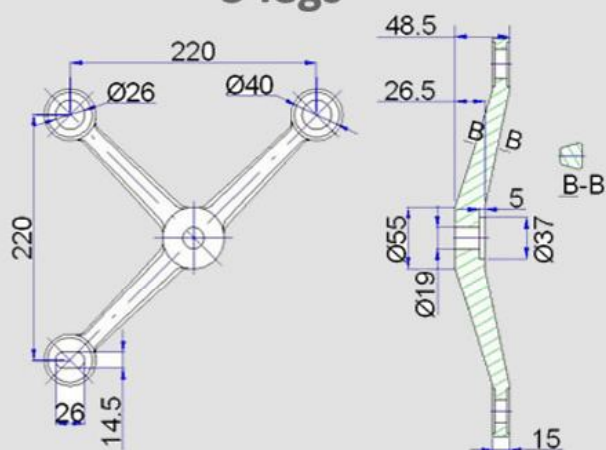


2 legs 90degree

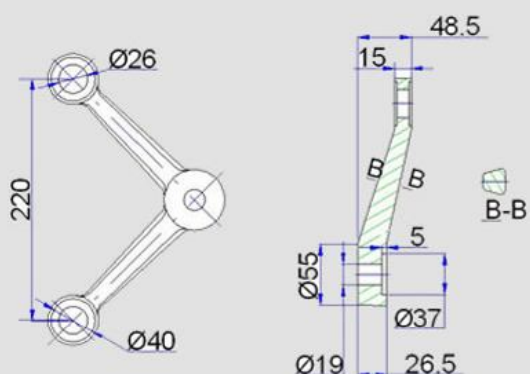


2 legs 180degree

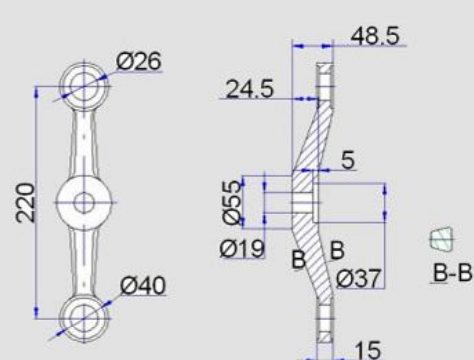

1 legs long

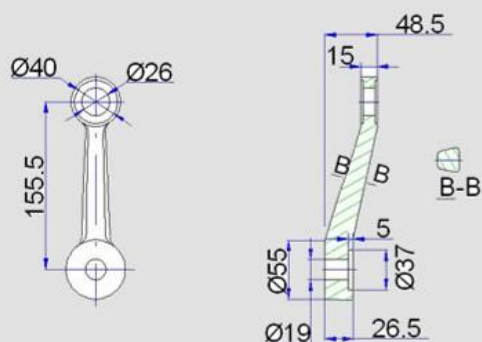

1 legs short

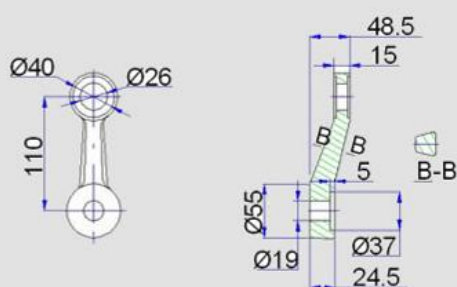

Spider fitting parts Center fix and Point fixing-Routles

Center fix



Routles



Assembled sets




- 1、爪件
- 2、驳接头
- 3、转接件

Spider fitting parts Center fix and Point fixing-Routles


Fix routles



Fix center fix

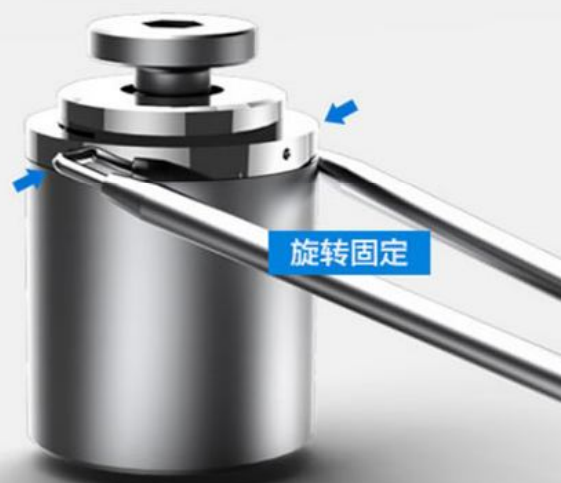

Install Tools

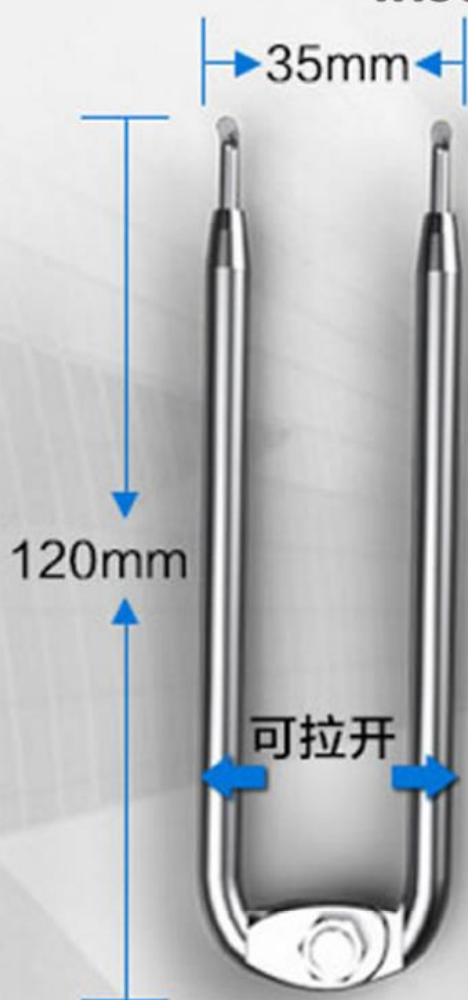

夹驳接头或转接件

