

## SAFTY FLOORING ACCESS SS316/SS304/BRASS/ALUMINUM

Warning tactile Bar & Strips

Handrails



Group has professional  
handrail on-line catalouge

Website [www.wanhuitongyang.cn](http://www.wanhuitongyang.cn)





**SAFTY FLOORING**  
access, safety and floor covering  
traffic facilities

Ningbo WanHuiTongYang Group  
[www.wanhuitongyang.cn](http://www.wanhuitongyang.cn)



**Tactile Guidance Systems**  
**SS316/304/Brass/Aluminum**  
**Floor Coverings**  
**Drain safety grates**  
**Stainless steel grilles**  
**Stainless steel manhole cover**  
**Stainless steel drainage system**



Tactile Guidance Systems



Safety Stair Edging

Entrance & Safety Matting

Drain safety grates

**WANHUITONGYANG**  
**万汇通洋**

The WanHuiTongYang Group production range are include:  
Safty flooring systems

Tactile Guidance Systems

Drain safety grates

Steel framing buildings

Building materials

Architecture metals

Decorate metals

Stainless steel fences

Stainless steel glass balustrades

CNC components

Fasteners

Tel:0086 13566346659 Fax:0086 57487365320

Email:sales@wanhuitongyang.cn Website:www.wanhuitongyang.cn



# WANHUITONGYANG GROUP

## Warning Tactile Indicators Pins



### Flat SS Pin

Smooth surface, Solid studs with pin

Place of Origin: Ningbo

Brand Name: WHTY

Function: Anti-slip and provide protection for the blind and disabled

DIMENSIONS: Outer Dia: 35mm or 25mm or Customs special OD


FINISH: Machined

FIXING METHOD: Drill and screw

TACTILE TYPE: Warning

LOCATION: Indoor, Outdoor

MATERIALS: 316 marine grade stainless steel / 304 / Brass

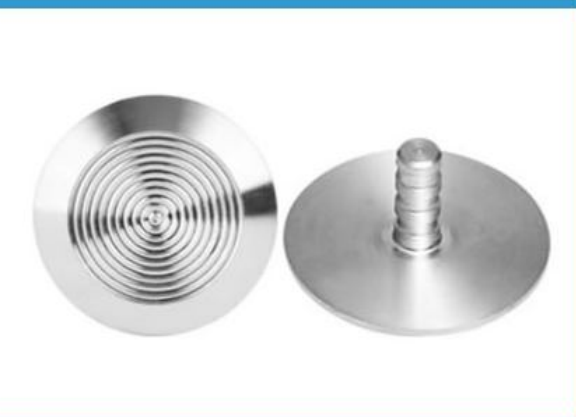

### Concentric Circles Stainless Steel Tactile Pin

Circled surface, Solid studs with pin

Place of Origin: Ningbo

Brand Name: WHTY

Function: Anti-slip and provide protection for the blind and disabled

DIMENSIONS: Outer Dia: 35mm or 25mm or Customs special OD

FINISH: Machined

FIXING METHOD: Drill and screw

TACTILE TYPE: Warning

LOCATION: Indoor, Outdoor

MATERIALS: 316 marine grade stainless steel / 304 Stainless steel

LUMINANCE RATING: Wet: 35.18 Dry: 38.45

SLIP RATING: R12

1) Concentric circles on surface ( 10 rings / 6rings/4rings / 2 rings or customize

2) Concentric circles on surface & circles on side

3) Spiricle

4) Circles on surface with hole in middle

5) Concentric circles with lip



### Tactile pins with different top

Solid studs with pin, Casting way, Welding way, CNC way

Place of Origin: Ningbo

Brand Name: WHTY

Function: Anti-slip and provide protection for the blind and disabled

DIMENSIONS: Outer Dia: 35mm/30/25 or customer special OD

FINISH: Machined

FIXING METHOD: Drill and screw

TACTILE TYPE: Warning

LOCATION: Indoor, Outdoor

MATERIALS: 316 marine grade stainless steel / 304 / Brass

# WANHUITONGYANG GROUP

## Warning Tactile Indicators Pins



### Luminous Stainless Steel Tactile Stud

Luminous surface, Solid studs with pin

Place of Origin: China

Brand Name: WHTY

Function: Anti-slip and provide protection for the blind and disabled

DIMENSIONS: Outer Dia: 35mm x Top Dia: 25mm x Thickness: 4.5mm

FINISH: Machined

FIXING METHOD : Drill and screw

TACTILE TYPE: Warning

LOCATION : Indoor, Outdoor

MATERIALS: 316 marine grade stainless steel / 304 Stainless steel



### Carborundum Insert Stainless Steel Tactile Studs

Carborundum surface, Solid studs with pin

Place of Origin: China

Brand Name: WHTY

Function: Anti-slip and provide protection for the blind and disabled

DIMENSIONS: Outer Dia: 35mm or 25mm or Customs special OD

FINISH: Machined

FIXING METHOD : Drill and screw

TACTILE TYPE: Warning

LOCATION : Indoor, Outdoor

MATERIALS: 316 marine grade stainless steel / 304 Stainless steel



### Carborundum Insert Brass Tactile Studs

Carborundum surface, Solid studs with pin

Place of Origin: Zhejiang

Brand Name: WHTY

Function: Anti-slip and provide protection for the blind and disabled

DIMENSIONS: Outer Dia: 35mm or 25mm or Customs special OD

FINISH: Machined


FIXING METHOD : Drill and screw

TACTILE TYPE: Warning

LOCATION : Indoor, Outdoor

MATERIALS: Brass+Carborundum



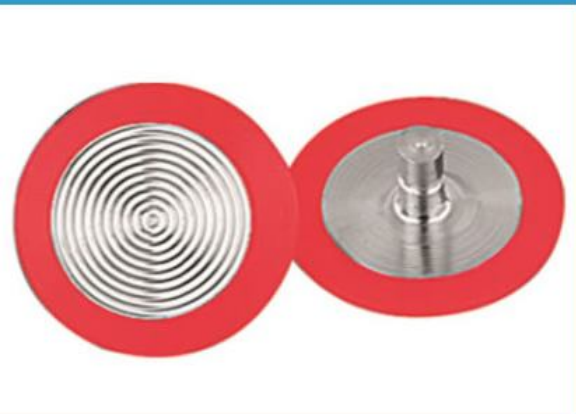

### Red Ring Waring Stainless Steel Tactile Indicator

Circle surface,Hollow studs with pin

Place of Origin:China

Brand Name:WHTY

Function:Anti-slip and provide protection for the blind and disabled

**DIMENSIONS:** Outer Dia: 35mm or 25mm or Customs special OD


**FINISH:** Machined

**FIXING METHOD :**Drill and screw

**TACTILE TYPE:** Warning

**LOCATION :**Indoor, Outdoor

**MATERIALS:** 316 marine grade stainless steel / 304 Stainless steel

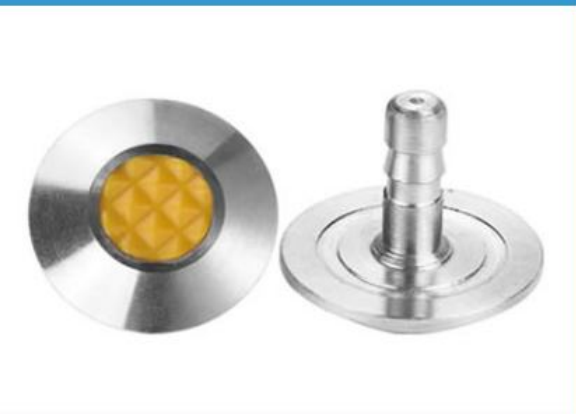

### Center Yellow Waring Stainless Steel Tactile Indicator

Plastics sunflower surface,Solid studs with pin

Place of Origin:China

Brand Name:WHTY

Function:Anti-slip and provide protection for the blind and disabled

**DIMENSIONS:** Outer Dia: Cutomer special OD

**FINISH:** Machined

**FIXING METHOD :**Drill and screw

**TACTILE TYPE:** Warning

**LOCATION :**Indoor, Outdoor

**MATERIALS:** 316 marine grade stainless steel / 304 Stainless steel



### Waring Stainless Steel Tactile Indicator

Plastics Circled surface,Hollow studs with pin

Place of Origin:Ningbo

Brand Name:WHTY Brand

Function:Anti-slip and provide protection for the blind and disabled

**DIMENSIONS:** Outer Dia: 35mm or 25mm or Customs special OD

**FINISH:** Machined

**FIXING METHOD :**Drill and screw

**TACTILE TYPE:** Warning

**LOCATION :**Indoor, Outdoor

**MATERIALS:** 316 marine grade stainless steel / 304 Stainless steel

- 1.Plastic on top with a long life without wear or deformation.
- 2.Designed in different colors
- 3.Injection technology will not fall off
- 4.CNC machine work ensure the precise size



# WANHUITONGYANG GROUP

## Warning Tactile Indicators Pins



### Screw plug type



Easy to install

Item: SF105 Carpet tactile

Material: Marine grade stainless steel SS316

Product Size: 35 or 25 or customer special OD with a screw and plug

Do It Yourself (DIY) with the installation kit.

R13 anti-slip rated

Tactile head won't separate from its anchor

Meet the Australian/New Zealand Standards AS/NZS 1428 part 4

Tactile Ground Surface Indicators Comply with the Building Code

of Australia and exceed the anti-slip requirements of AS/NZ4586.



### Tactile Indicator Bar & Strips

Line surface, Solid strips with pin

Place of Origin: Zhejiang, China (Mainland)

Brand Name: WHTY

Advantage: Cross hatch pattern / Lines / Flat surface available

Function: Anti-slip and provide protection for the blind and disabled

DIMENSIONS: 290mm/280mm/270mm 3mm or 5mm

FINISH: Anodized

FIXING METHOD: Drill and Glue or Press plug

TACTILE TYPE: Directional

LOCATION: Indoor, Outdoor

MATERIALS: Aluminum

LUMINANCE RATING: Wet: 35.18 Dry: 38.45

SLIP RATING: R12

### Brass Tactile Indicator Bar & Strips

Sunflower surface, Hollow strips with pin

Place of Origin: Zhejiang, China (Mainland)

Brand Name: WHTY

Advantage: Fastness

Function: Anti-slip and provide protection for the blind and disabled

DIMENSIONS: 290/280/270mm 35mm, 30mm or customer drawing

FINISH: Anti-slip grains

FIXING METHOD: Drill and Glue or Press plug

TACTILE TYPE: Directional

LOCATION: Indoor, Outdoor

MATERIALS: Brass







## Directional Stainless Steel Tactile Indicator

Sunflower + grooved surface, Hollow strips with pin

Place of Origin: China

Advantage: New design, good anti-slip

Function: Anti-slip and provide protection for the blind and disabled

DIMENSIONS: 290/280/270mm x W: 35/30mm x 3mm/5mm

FINISH: Brush Polish

FIXING METHOD: Drill and Glue or Press plug

TACTILE TYPE: Directional


LOCATION: Indoor, Outdoor

MATERIALS: 316 marine grade stainless steel / 304 / Brass



## BLIND PERSON PROTECT FLOORING SAFTY STUD ANTI-SLIP FLOORING

USEFUL: FLOORING SAFTY

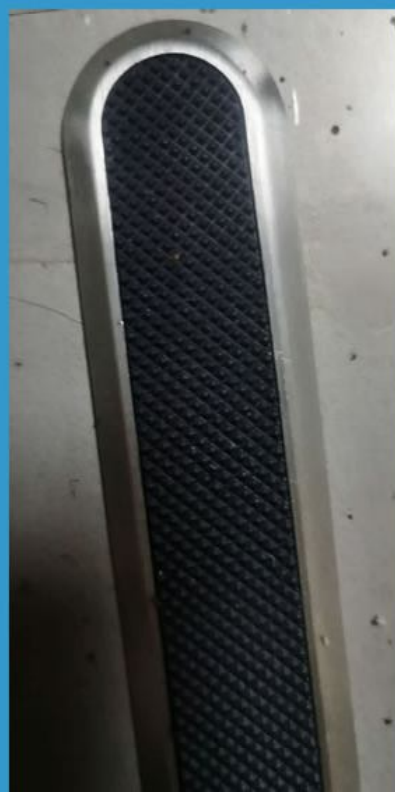





### Directional Stainless steel tactile indicator

Sunflower surface, Solid strips with pin

Place of Origin: China

Function: Anti-slip and provide protection for the blind and disabled

DIMENSIONS: 280/270mm x W: 35/30mm x H: 5mm/3mm

FINISH: Grain anti-slip

FIXING METHOD: Drill and Glue or Press plug

TACTILE TYPE: Directional

LOCATION: Indoor, Outdoor

MATERIALS: 316 marine grade stainless steel / 304/Brass



### Luminous Stainless Steel/Brass Tactile Bar

Luminous surface, Solid strips with pin

Place of Origin: Ningbo

Advantage: Last over 10 hours after absorbing light during the day

Function: Light in the dark and provide protection for the blind and disabled

FINISH: Brush Polish

FIXING METHOD: Drill and Glue or Press plug

TACTILE TYPE: Directional

LOCATION: Indoor, Outdoor

MATERIALS: 316 marine grade stainless steel / 304/Brass



### Carborundum Insert Stainless Steel Tactile Bar

Carborundum surface, Solid strips with pin

Place of Origin: Ningbo

Advantage: Good non-skid effect, Any color available

Function: Anti-slip and provide protection for the blind and disabled

DIMENSIONS: 290/280/270mm x W: 35/33/30mm x 3mm/5mm

FINISH: Brush Polish


FIXING METHOD: Drill and Glue or Press plug

TACTILE TYPE: Directional

LOCATION: Indoor, Outdoor

MATERIALS: 316 marine grade stainless steel / 304/Brass



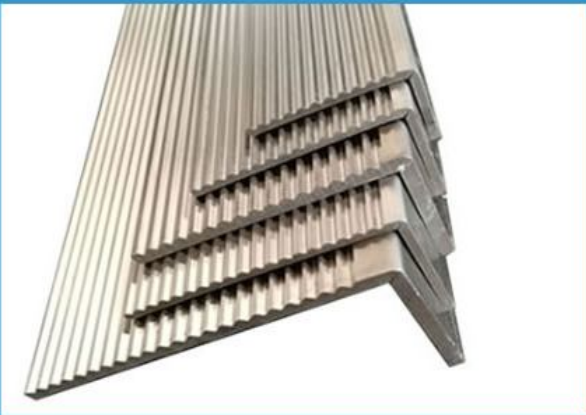

## Stainless Steel Stair Nosing

This is a stainless steel stair nosing that makes a stair/step edge attractive and safe to walk on and can be retrofitted in existing stairs.

Available in stainless steel(V2A), the profile can be used both internally or externally in residential and commercial buildings in areas which are accessed on a moderately frequent basis.

The stainless steel stair nosing is widely used in the foodstuff industry, hospitals, swimming pools and breweries and comes in 3.0m lengths. It may be fixed in place with construction adhesive.

1. Achieves an R11 safety rating,
2. Supplied pre-drilled ready to install
3. Are supplied with all necessary stainless steel fixing screws and anchors
4. Can be retro-fitted onto concrete, ceramic tiles, timber, carpet (direct st
5. Any Size available 30 x 10 , 30 x 20 , 30 x 30 mm 40\*10,40\*20 ,40\*30 ,

### METAL BACKING

304: 304 Grade Stainless Steel 2.0 mm/ 3.0mm

316: 316 Grade Stainless Steel 2.0 mm/ 3.0mm



## Semi-Automatic Stainless Steel Bollard

Semi-automatic bollard is used for channel control system with high security but lower use frequency.

Semi-automatic bollard is normally suitable for access control system of higher security demand but low frequency.

SIZES OF BOLLARD: Diameter of 89mm, 102mm, 114mm, 133mm, 168mm, 220mm, 275mm, 330mm and other customization size

MATERIALS: FE, SS304, SS316 and all kinds of composite materials



## Bolted Stainless Steel Bollard

Stainless Steel Bollard can be embedded in concrete for simple and secure installations.

Its clean and versatile design is highly visible and available with alternative mountings (see retractable and removable models) for consistent aesthetic that suit any modern building or landscape. High-quality 316 grade stainless steel with #6 satin finish features high resistance to corrosion and weathering. Posts ship standard with 1 of 4 colored reflector stripes.

Fixed bollard is usually used for the permanent closed area, including street design fixed bollards and security fixed bollards





SIZES OF BOLLARD: Diameter of 89mm, 102mm, 114mm, 133mm, 168mm, 220mm, 275mm, 330mm and other customization size

MATERIALS: FE, SS304, SS316 and all kinds of composite materials



# WANHUITONGYANG GROUP


Stainless steel water channel, grilles, manhole cover, Linear drain

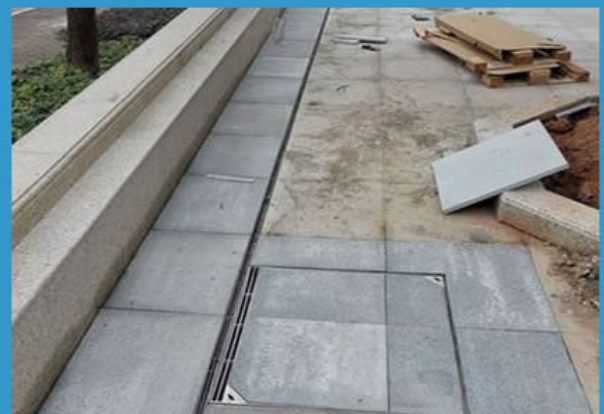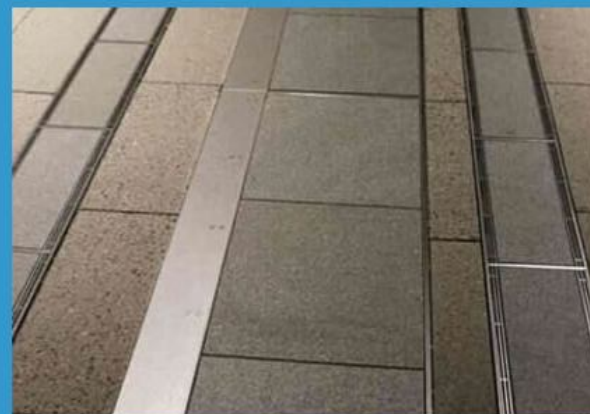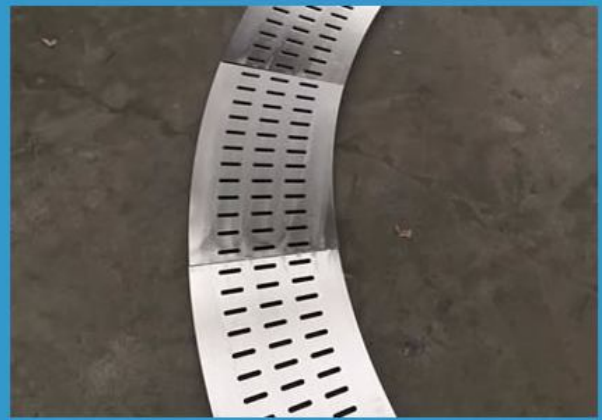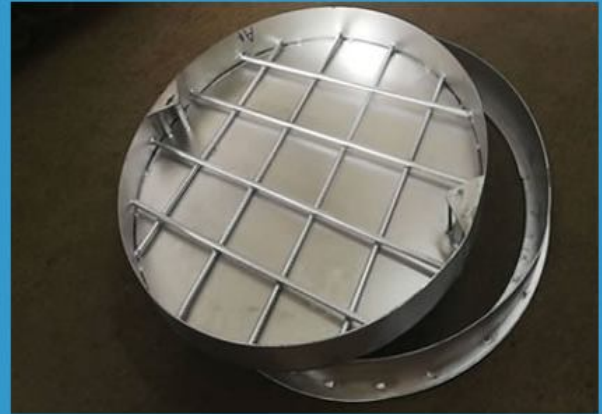



# WANHUITONGYANG GROUP



Stainless steel water channel, grilles, manhole cover, Linear drain

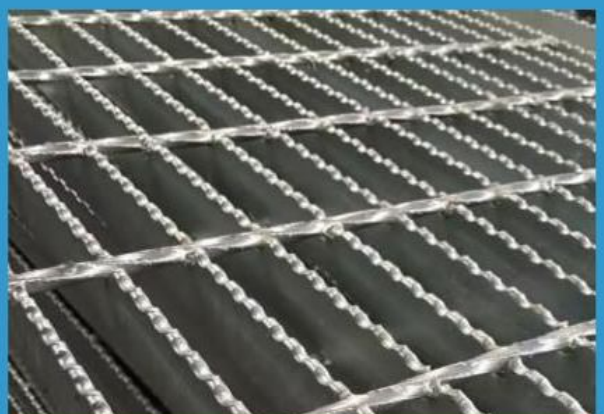



# WANHUITONGYANG GROUP

Full automatic hydraulic lifting column electric remote control  
semi automatic lifting column manual road pile anti collision lifting and  
blocking road block

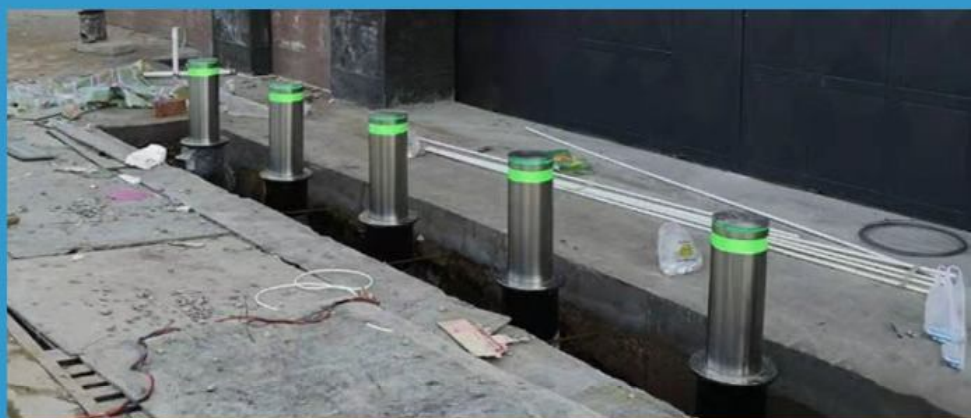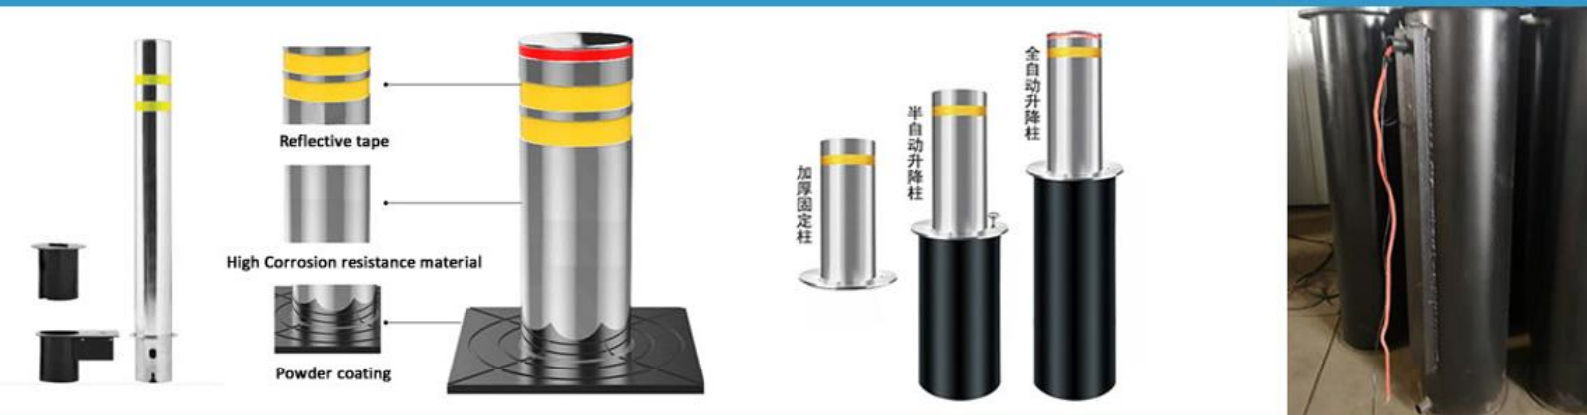




# WANHUITONGYANG GROUP

Stainless Steel Bike Rack, Steel Bike Rack


Anti riot and anti collision road barrier, Traffic barrier




Stainless steel 304/316

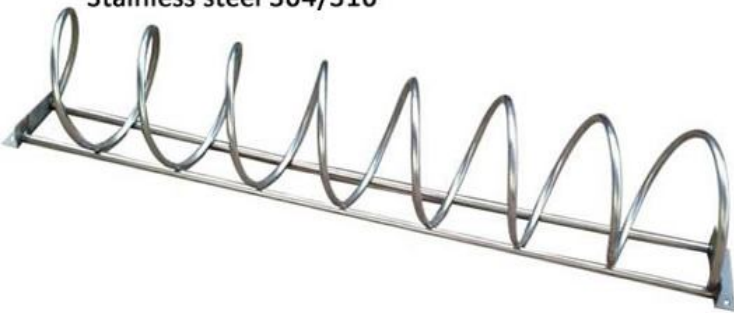

Bike stop  
Length 2-3meters

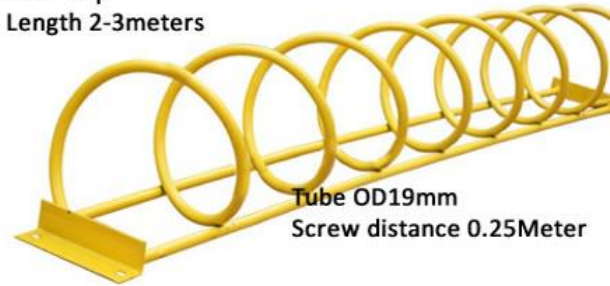

Tube OD19mm  
Screw distance 0.25Meter

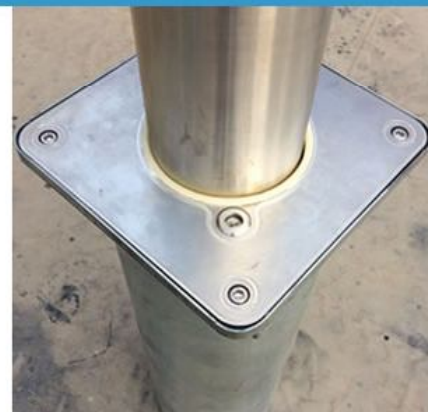



# WANHUITONGYANG GROUP

Stainless steel car stop, Rubber wheel parking positioner  
Rubber plastic garage stop device, Rubber parking stop



Stainless steel car stop






# WANHUITONGYANG GROUP

Rubber wheel parking positioner  
Rubber plastic garage stop device, Floor lock



High flexibility and toughness

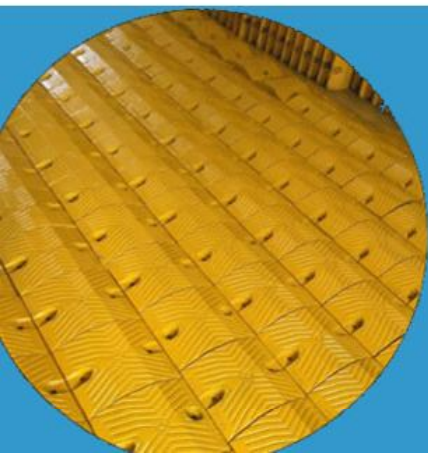



# WANHUITONGYANG GROUP

Pedestrian access gate  
gate access control system





# WANHUITONGYANG GROUP

Flooring fixings



Concrete anchor bolts, Wheel stop screw  
Dyna bolt, Sleeve anchor, Windows screws and so on



Please visit our production other fastener with Fastener PDF catalogue





**SAFTY FLOORING**  
**access, safety**  
**floor covering**  
**traffic facilities**

**Ningbo WanHuiTongYang Safty flooring MFG Co. Ltd**  
**[www.wanhuitongyang.cn](http://www.wanhuitongyang.cn)**

Ningbo WanHuiTongYang Fastener MFG Co.,Ltd.  
Ningbo WanHuiTongYang Building Material MFG Co.,Ltd.  
Ningbo WanHuiTongYang Safty Flooring MFG Co.,Ltd  
Ningbo WanHuiTongYang Architectural Glass Metalwors MFG Co.,Ltd.  
Ningbo WanHuiTongYang Metal Products MFG Co.,Ltd.  
Ningbo WanHuiTongYang Glass Fastener and Aluminium MFG Co.,Ltd.  
Ningbo WanHuiTongYang International Trading Co.,Ltd.  
Ningbo WanHuiTongYang Group  
Tel:0086 13566346659  
Fax:0086 57487365320  
EEmail:sales@wanhuitongyang.cn  
Website:www.WanHuiTongYang.cn  
Office Address:Room1806, 18F World Trade Plaza Building,  
No.1,Zhenningdonglu,Ningbo,China  
Head Engineer Address: No.988 ZhenNingDongLu,Ningbo, China  
Factory Address: No. 689 Jiangbei Industry Park,  
Changxing road, Ningbo, China  
Factory Address: No.681 Economic Development Zone,Ningbo,China